


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

ELECTRICAL DATA		
P/N	Frequency (GHz)	VSWR max
2.4-50JR-2W	DC-50GHz	1.40

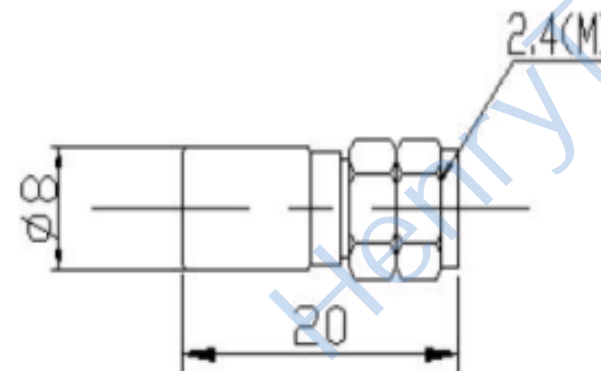

MATERIAL&FINISH	
Outerconductor:	Stainless steel,Passivated
Pin contacts:	Stainless steel,Passivated
Characteristic impedance :	50Ω
Temperature range:	-55°C~+125°C
Connector Type:	2.4-J
Size:	J Ø 8×20mm ,±1%
Weight::	5g

Tel:Lee13890694956

Web:www.hltchips.com

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:  
RF Coaxial Termination  
2.4 2 Watts DC-50GHZ



DIMENSION IN MILLIMETERS (mm)

PART NO:	HL-2.4-50JR-2-50	SIZE:	A4	SCALE:	N/A	SHEET:	1/1	REV:	A
----------	------------------	-------	----	--------	-----	--------	-----	------	---