


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

- 1 Electrical**
- 1.1 Impedence: 50 Ω
 - 1.2 Frequency: DC~6GHz
 - 1.3 Dielectric withstanding voltage: 1000V(volts RMS)
 - 1.4 Center contact resistance: ≤ 3MΩ
 - 1.5 Outer contact resistance: ≤ 2MΩ
 - 1.6 Insulation resistance: ≥ 5000MΩ
 - 1.7 Power: ≤ 10W
 - 1.8 PIM Requirement: -150dBc

- 2 Environmental&Mechanical**
- 2.1 Temperature range: -40℃~+125℃
 - 2.2 RoHs Compliant
 - 2.3 Durability: >500 cycles

- 3 Materials&plating**
- 3.1 Body: Brass, Suco-plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Silver, gold plated
 - 3.4 Coupling Nut: Brass, Suco-plated

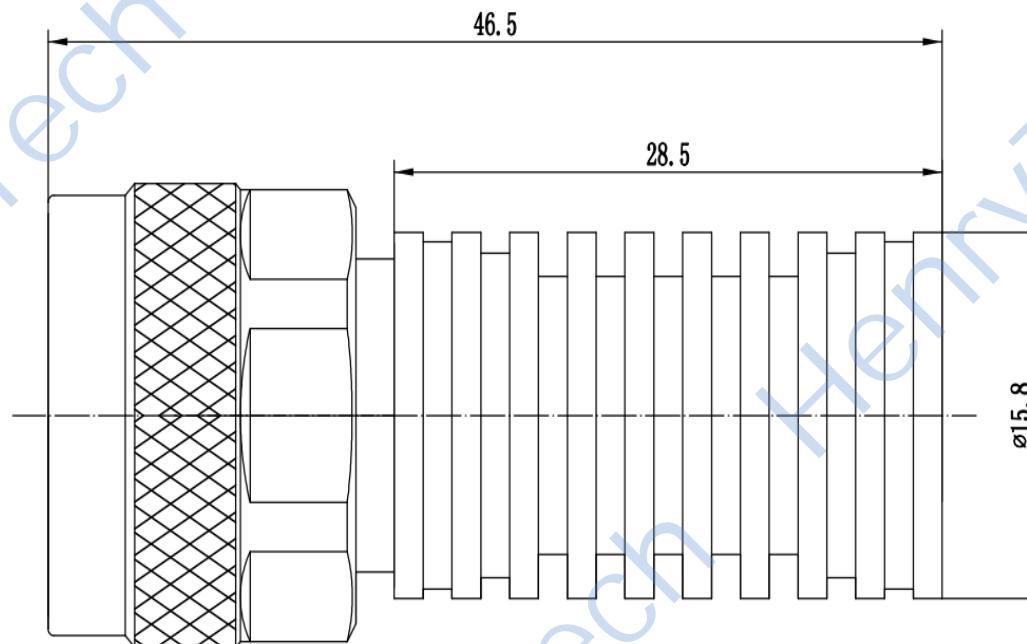

Tel:Lee13890694956

Web:www.hltchips.com

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:
RF Termination
N Male Conn.
Termination 10 Watts



DIMENSION IN MILLIMETERS (mm)

PART NO: HL-N-50JR-10-6	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
-------------------------	----------	------------	------------	--------