


HLT-DC/450-5S

5- Way Resistor Power Divider

Specifications

| SN | Parameters | Specifications |
|----|------------------------------|--|
| 1 | 频率范围 Frequency Range | DC~450 MHz |
| 2 | 插入损耗 Insertion Loss | ≤ 17.0 dB |
| 3 | 输入驻波 Input Port VSWR | Typ.1.11 / Max.1.20 |
| 4 | 输出驻波 Output Port VSWR | Typ.1.10 / Max.1.20 |
| 5 | 隔离度 Isolation | Min.15dB |
| 6 | 幅度平衡 Amplitude Balance | ± 0.6dB |
| 7 | 阻抗 Impedance | 50 Ohms |
| 8 | 端口接头 Input/Output Connectors | SMA-Female |
| 9 | 承受功率 Power Rating | 1W |
| 10 | 工作温度 Operation Temperature | -35°C ~ +75°C |
| 11 | 表面处理 Surface Finishing | Sandblasting natural color conductive oxidation 喷砂本导 |
| 12 | 外形尺寸 Outline Dimensions | 25.4*29.3*16 (mm) |
| 13 | 重量 Weight | 约 150 (g) |

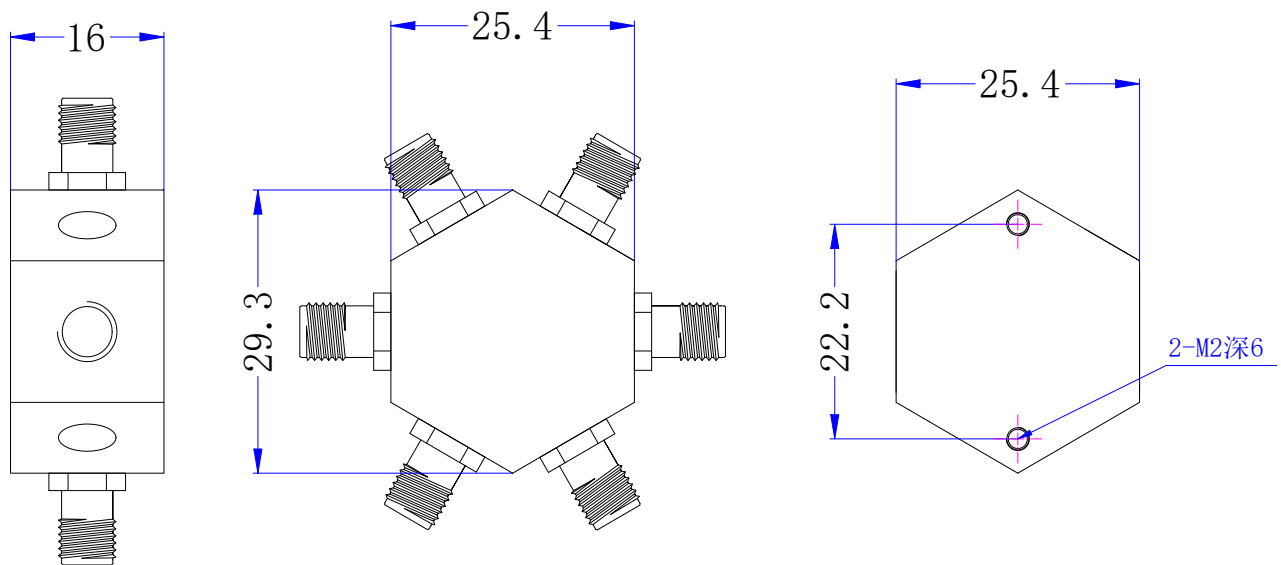

Note: Dimensions (mm / [inch]), General tolerance (±0.3)