


# HLT-0.5/26.5-4S

## 4-Way Power Divider

### Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	500~26500 MHz
2	插入损耗 Insertion Loss	≤ 5.2 dB (Excluding theoretical loss 未含理论损耗 6.0 dB)
3	输入驻波 Input Port VSWR	Typ.1.28 / Max.1.6
4	输出驻波 Output Port VSWR	Typ.1.28 / Max.1.6
5	隔离度 Isolation	Typ.26dB / Min.16dB
6	幅度平衡 Amplitude Balance	±0.4dB
7	相位平衡 Phase Balance	±6°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	SMA-Female 不锈钢
10	承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
11	工作温度 Operation Temperature	-45°C ~ +85°C
12	表面处理 Surface Finishing	Black paint 黑色烤漆
13	外形尺寸 Outline Dimensions	158.5*56.5*12.7 (mm)
14	重量 Weight	330 (g)

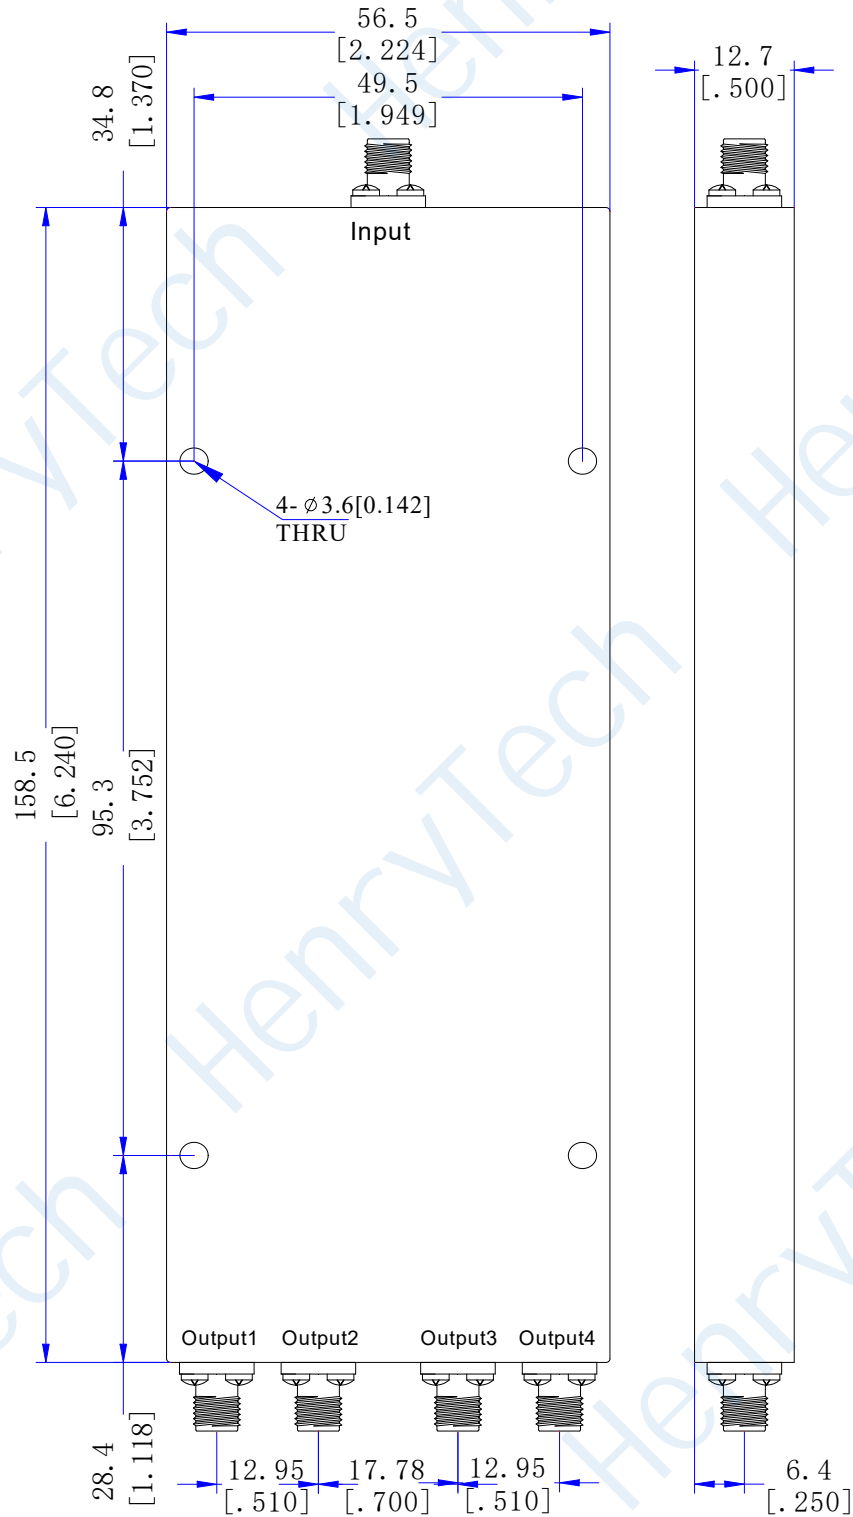

Note: Dimensions (mm / [inch]), General tolerance ( $\pm 0.3$ )