

1

2

3

4

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	12/7/06	12/7/06

1 Electrical

- 1.1 Impedance: 50 Ω
- 1.2 Frequency: DC-26.5GHz
- 1.3 VSWR: 1.25:1

2 Mechanical & Environmental


- 2.1 Temperature range: -45°C ~ +85°C
- 2.2 Durability (matings): >500
- 2.3 RoHS Compliant: Yes

3 Material & Finish

- 3.1 Pin contact: Beryllium-Copper, gold plated
- 3.2 Body: Stainless Steel (SU303), Passivated
- 3.3 Insulators: PEI



4 Interface Standards

- 4.1 3.5 IEC60169

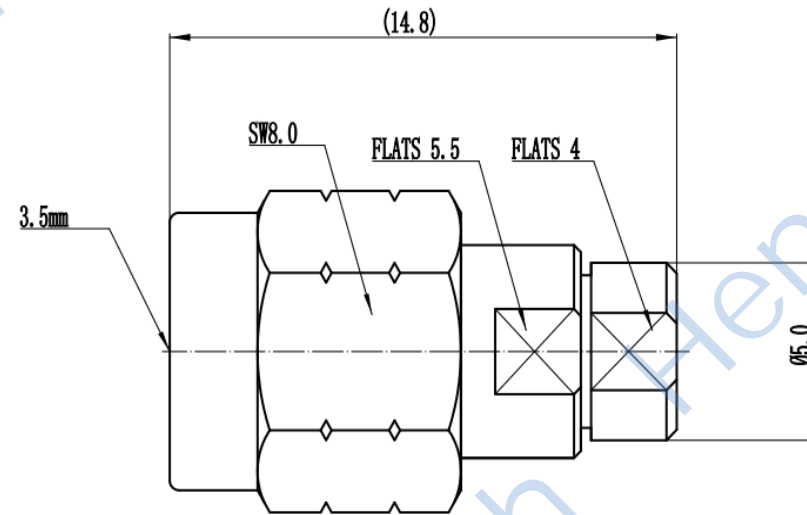

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 12/07/06 ENGINEER: L.yu 12/07/06 APPROVED: W.yi 12/07/06	<b>TITLE:</b> Precision RF Connector 3.5 Male Conn. For Gore3506 Cable	  DIMENSION IN MILLIMETERS (mm)
<b>TOLERANCES UNLESS OTHERWISE SPECIFIED</b> .X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	<b>PART NO:</b> HL-3.5-J3506G	

1

2

3

4